

Frigomilk® New 100 Line



Frigomilk® G1



Frigomilk® New 100 Line



Open Milk Cooling Tanks from 100 to 300 litres

TECHNICAL SPECIFICATIONS

MANUFACTURE:

- AISI 304 stainless steel inner tank and outer casing.
- Total primary Trapcold™ laser welded evaporator surface with maximum yield.
- Very thick ecofriendly and performing insulation by polyurethane foam.

- DN50 outlet - butterfly valve included.
- Millimeter stainless steel dip-stick with direct reading of the milk-level in litres.

COOLING SYSTEM:


- Non-icing cooling even with low filling level.
- Direct expansion.
- Stainless steel casing.
- Compact and easy to install.

ELECTRIC SYSTEM:

- FIPO 0 electronic milkcontroller.
- Milk temperature check and display.
- Stirring program.
- Electrical feeding cables with standardised plug (male).
- 230V 50HZ single-phase

ON REQUEST:

- Stainless steel elbow.
- 60hz voltage.

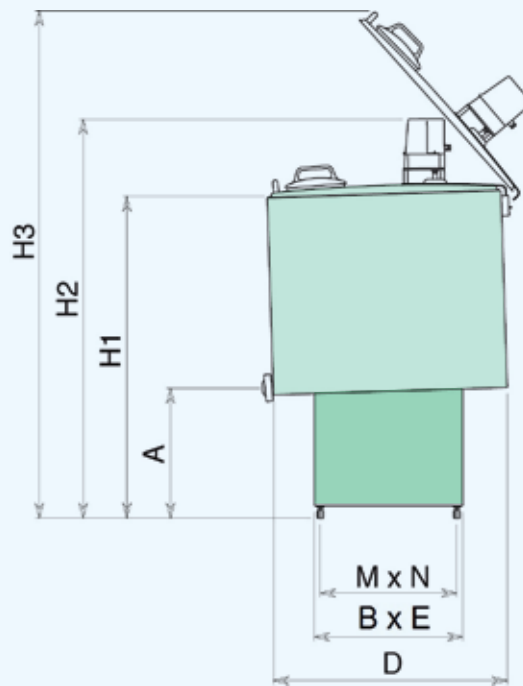

MODEL		VOLTAGE (volt)	VOLUME (litres) MaxNominal		DIMENSIONS				FEET POSITION M x N (mm)	CONDENSING UNIT			WEIGHT (kg)
					D (mm)	H1 (mm)	H2 (mm)	H3 (mm)		A (mm)	B x E (mm)	Compr. HP	
100	2M	1.230	105	100	611	910	1160	1500	344 x 332	330	370 x 383	0,33	54
200			212	200	784	1060	1300	1800	457 x 437	410	480 x 500	0,5	77
300			312	300	921	1115	1405	2000	556 x 558	440	605 x 605	1	113

2M = 2 milkings



MİLKOMAK Gıda Endüstrisi Makineleri Sanayi ve Ticaret Ltd. Şti.

Göksu Evleri, Üst Çamlık Cd. No.73 (B215B) Anadoluhisarı 34815 Beykoz/İstanbul
T: +90.216.668 08 80 (pbx) www.milkomak.com.tr milkomak@milkomak.com.tr

Any specification may be modified without notice. Rev. n. 2



Frigomilk® New 100 Line



100 ile 300 litre arası Açık Süt Soğutma Tankları

TEKNİK ÖZELLİKLER

GÖVDE:

- AISI 304 paslanmaz çelikten yapılmış iç ve dış yüzeyler
- Lazer kaynaklı Evaporatör Patentli TRAPCOLD ısı değişirme yüzeyine sahip olup maksimum verimlidir.
- Çevre ve doğa dostu kalın poliüretan köpük yalıtım .

- AISI 304 DN50 Çıkış Kelebek vanası.
- Litre cinsine dönüştürülmüş AISI 304 paslanmaz Çelik, kalibrasyonlu milimetrik ölçüm çubuğu.

SOĞUTMA SİSTEMİ:


- Düşük seviyelerde buzlanmama özelliği
- Direkt genişlemeli soğutma
- Paslanmaz çelik kasa.
- Kompakt ve kurulumu kolaydır.

ELEKTRİK SİSTEMİ:

- FIPO 0 elektronik süt kontrol cihazı.
- Görüntülü Süt sıcaklığı ayarı ve kontrolü.
- Karıştırma devri programı.
- Elektrik besleme kablosu standart erkek fiş
- 230V 50HZ tek fazlı

İSTEK ÜZERİNE:

- Paslanmaz çelik dirsek.
- 60 hz voltaj.

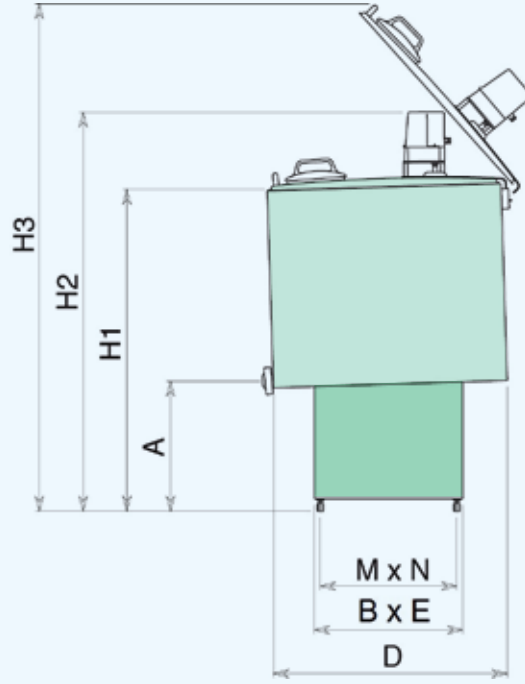

MODEL		VOLTAJ (volt)	HACİM Litre		ÖLÇÜLER				AYAK SAYISI M x N (mm)	SOĞUTMA ÜNİTESİ			AĞIRLIK (kg)
					G (mm)	H1 (mm)	H2 (mm)	H3 (mm)		A (mm)	B x E (mm)	Compr. HP	
			Max	Optimum									
100	2M	1.230	105	100	611	910	1160	1500	344 x 332	330	370 x 383	0,33	54
200			212	200	784	1060	1300	1800	457 x 437	410	480 x 500	0,5	77
300			312	300	921	1115	1405	2000	556 x 558	440	605 x 605	1	113

2M = 2 SAĞIM



MILKOMAK Gıda Endüstrisi Makineleri Sanayi ve Ticaret Ltd. Şti.

Göksu Evleri, Üst Çamlık Cd. No.73 (B215B) Anadoluhisarı 34815 Beykoz/İstanbul
T: +90.216.668 08 80 (pbx) www.milkomak.com.tr milkomak@milkomak.com.tr

Any specification may be modified without notice. Rev. n. 2